

Impact-R 4100S





Features

The Impact-R 4100S series computers are powered by Intel® based motherboards, delivering a compact and flexible computer platform.


- Intel® Comet lake CPU architecture
- DDR4 Memory up to 128GB
- Supports dual native displays simultaneously

Our production processes are controlled under ISO 9001 and every system undergoes a full diagnostic burn-in prior to shipment.


Dimensions

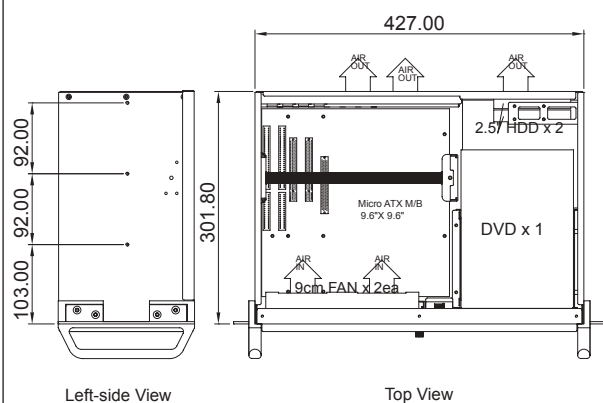

Rear View

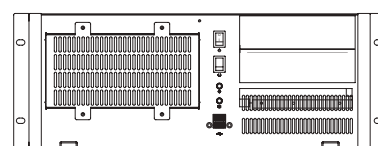

Front in-side View

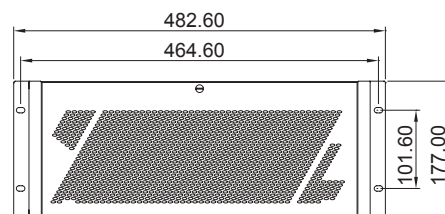

Front out-side View

Impact-R 4100S

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Specifications

Hardware Specification	CPU: Intel® LGA1200 10th Generation Celeron/Pentium/i3/i5/i7/i9 Chipset: Intel® Q470E Memory: Dual DIMM (max 128GB DDR4 2666MHz non-ECC) Graphics: Integrated GPU: DP - max 4096*2304 @ 60Hz LAN: Dual Intel® GbE : I219LM/I211AT	Environmental operation	Vibration: 0.25g sine sweep @ 1 octave per minute from: 10 to 500Hz (longitudinal)* Shock: 10G 1/2 sine 11ms* * Higher levels are achievable by use of an SSD, or ruggedized hard drive. Acoustic noise: 49dB(A) sound pressure at 23°C (typical) Temperature: 5 to 60°C (tested for extended operation up to 50°C) Humidity: 5 to 90% at 25°C non-condensing Low noise fan options are available (maximum operating temperature 35°C) We can design systems to meet additional requirements
BIOS	AMI EFI 128 Mbit SPI	Environmental storage	Temperature: -20 to 70°C Humidity: 5 to 90% at 25°C non-condensing
Storage	4 x 2.5" SSD/HDD 1 x M.2 (B Key) (2280)	Certifications	CE/UKCA
System Expansion	1 x PCIe x16 1 x PCIe x16 (x4 logical) 1 x PCIe x1 M.2 M key (2280 NVMe PCIe x4 and SATA M.2 support)		
Supported O/S	Microsoft Windows 10 64-bit, Linux		
LED's and Switches	Power (PC on) LED Hard Disk Drive access LED ATX system control switch System reset switch		
External Interfaces	Front: 2 x USB 2.0 On/Off Switch, Reset Pwr/HDD LED Rear: 2 x GbE (RJ-45) 4 x USB 3.2 (Gen2) 2 x DP++ 1 x Line-out, 1 x Mic-in		
Optional Breakout Interfaces (Will use 1 slot per breakout)	5 x RS-232, 1 x RS-232/422/485 6 USB 2.0 2 x USB 3.2 gen 1 Ps/2 16 bit GPIO		
Mechanical	Design: EIA RS-310C 19" Rackmount Standard Construction: Heavy Duty Cold Rolled Electroplated Steel Color: Black (Standard), Beige or Custom Dimensions: 483(W) x 177(H) x 302(D)mm (19" x 7" x 11.9") Package Size: 605(W) x 340(H) x 545(D)mm (23.8" x 13.4" x 21.4") Cooling Units: 2x92mm(51CFM each) & 2x60mm(23.5CFM each) Gross Weight: 12.1 kg		

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com