

# Impact-T 480

## Features




The Impact-T 480 is a compact, low power embedded system, utilising Intel® 8th and 9th Generation mobile iCore™ processing technology. This achieves high processing power with minimal power draw.



Key features:-

- Low power consumption
- High end processing power
- 4 Slot expansion system
- 3 year warranty
- 15 Year life cycle


## Dimensions




Top View

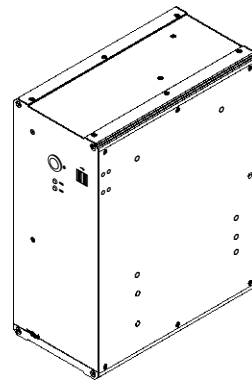

Front View



Right Side View



Rear View


## Impact-T 480

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

### Specifications

Hardware specifications	CPU: 8th Generation Intel® Core™ Processors, LGA 1151 Socket, TDP up to 35W 9th Generation Intel® Core™ Processors, LGA 1151 Socket, TDP up to 35W Main memory: 4GB SODIMM DDR4 (max: 32GB 2666MHz MHz) Chipset: Intel® Q370 LAN: Dual integrated 10/100/1000 network connection	Main board power options	Supports DC input voltage +9-36VDC
BIOS	AMI	Mechanical	Design: Rugged compact embedded design Cooling: Fanless design Construction: Extruded Aluminium Colour: Black Dimension: 290 x 132 x 250mm (W x H x D) Gross Weight: 3.6kg
Storage	2 x 2.5" SSD/HDD Support for RAID 0 and 1	Environmental operation	Acoustic noise: Near silent operation Operating Temperature: 0°C to 55°C Humidity: 0 to 90% non-condensing
System expansion	Impact-T481: <ul style="list-style-type: none"> <li>1 x PCIe x4 (Gen 3)</li> <li>1 x PCIe x16 (Gen2)n (X1 Signal)</li> <li>2 x PCI</li> <li>1 x M.2 2280 M Key (PCIe Gen3 x 4)</li> <li>1 x M.2 2230 E Key (USB/PCIe)</li> </ul> Impact-T482: <ul style="list-style-type: none"> <li>1 x PCIe x4 (Gen 3)</li> <li>3 x PCI</li> <li>1 x M.2 2280 M Key (PCIe Gen3 x 4)</li> <li>1 x M.2 2230 E Key (USB/PCIe)</li> </ul>	Environmental storage	Temperature: -20°C to 70°C Humidity : 5% to 90% @ 20°C
Supported O/S	Windows 10/Linux	Electromagnetic compatibility (EMC)	EN 55022 Class A EN 55024 Electrostatic discharge immunity test (EN61000-4-2) Enclosure port ±4kV Contact, applied to enclosure port ±8kV Air, applied to enclosure port  Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3)  Enclosure port 80-1000MHz, 10 V/m (RMS, no modulation) 80% Modulation with 1kHz Sine wave  Electrical fast transient/burst immunity test (EN61000-4-4) Power port inc. protective earth Severity ±0.5kV  Immunity to conducted disturbances induced by radio frequency fields (EN61000-4-6)  Power port inc. protective earth via CDN M3 0.15-80MHz, 10 V/m (no modulation) 80% Modulation with 1kHz Sine wave, applied via CDN  Amplicon own a fully equipped EMC facility and can provide many additional tests to meet your requirements.
External Interfaces	4 x USB 3.1 2 x USB2.0 (Front) 2 x RJ45 LAN 2 x RS-232 2 x RS-232/422/485 2 x DP++ 1 x VGA (Optional)	Certifications	CE
Display	DP1.2: resolution up to 4096x2304 @ 60Hz		
LED and switches	Power (PC on LED) Hard disk access LED ATX system control switch		

### Rear I/O plate

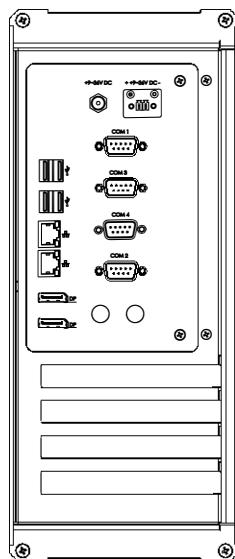

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: [www.amplicon.com](http://www.amplicon.com) Email: [sales@amplicon.com](mailto:sales@amplicon.com)