Senses 1115



Features


The Senses 1115 is a fanless Industrial Panel PC utilising the Intel's superb Tiger lake processor and provides a 15.6" TFT LCD touchscreen and an IP65 rated front panel.

Features:

- Projective Capacitive front panel (10 point)
- P65 Front panel
- VESA/Wall/Panel mountable
- Optional Wi-Fi

Each Industrial Panel PC comes with a 2 year warranty.

Dimensions

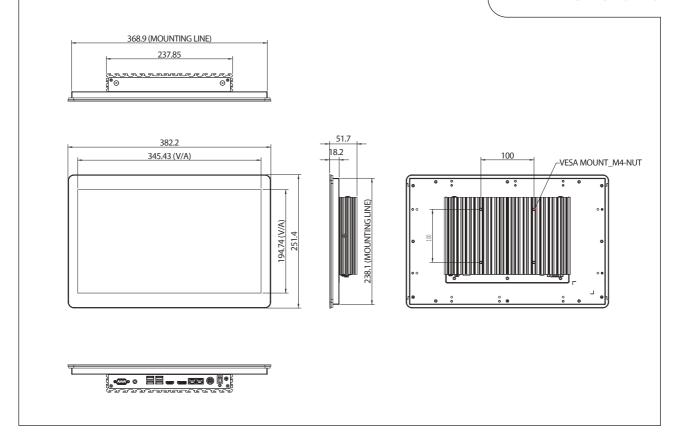

Amplicon.com

IT and Instrumentation for industry

Amplicon

Senses 1115

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notic

Specifications

Hardware specification	Onboard 11th Generation Intel® Core™ i3-1115G4E processor, dual core, 2.2 GHz base frequency, 6M cache (formerly fliger Lake-UP3) Intel® UHD graphics 630 on i3 processor Onboard 11th Generation Intel® Core™ i5-1145G7E processor, dual core, 1.5 GHz base frequency, 8M cache (by request) Intel® Iris® Ne graphics on i5 processor. Main Memory: 8GB DDR4 2133MHz (max 32GB) Video: Intel® UHD graphics 630 on i3 processor Intel® Iris® Ne graphics on i5 processor LAN: Dual GbE Intel Ethernet controllers Optional WLAN	Mechanical Environmental	Shock - IEC 60068-2-27 - 50g peak acceleration (11 msec. duration) System: 382.2mm x 251.4mm x 51.7mm System weight: 3.0 kg Package: 476mm x 355mm x 206mm Package weight: 4.7kg Temperature: Operating: 0°C to 50°C Storage: -20°C to 60°C
BIOS Storage	AMI 1 x M.2 2280 Key M SSD, support PCIe x4		Operating humidity: 10% to 90% relative humidity, non-condensing limits to be at 90%
Display System expansion	Display type: 15.6" TFT LCD Resolution(16:09): 1920 x 1080 Brightness (cd/m): 450nits 1 x M.2 2230 Key E, support optional Wi-Fi modules	Powersupply	1 x External 60W AC/DC power adapter with lock (power adapter is included in accessory) Input: 100VAC to 240VAC Output: DC+12VDC
Supported OS (Operating System)	Windows 10 IoT 64-bit Linux (If your desired operating system is not listed, please contact us.)	Certification	CE/UKCA
External Interfaces	2 x Antenna hole 1 x R5232/422/485 2 x R.145 Intel® Gigabit LAN port 1 x HDML 20 4 x USB 3.0 1 x Line out 1 x 12VDC jack		
LEDs & switches (bottom)	LED for power on/off Power switch		



Sales: +44 (0) 1273 570 220 Website: www.amplicon.com Email: sales@amplicon.com